



V-BOX HTTP API Manual

Website: <http://www.we-con.com.cn/en>

Technical Support: support@we-con.com.cn

Skype: fcwkkj

Phone: 86-591-87868869

QQ: 1043098682

Technical forum: <http://wecon.freeforums.net/>



Contents

1	General.....	3
1.1	Interface parameter description	3
1.2	Example key and value	4
2	Basic API.....	5
2.1	Login operation.....	5
2.1.1	Parameters	5
2.1.2	Operating procedures	5
2.1.3	Result.....	6
3	Service data APIs.....	8
3.1	V-Box list.....	8
3.1.1	Parameters	8
3.1.2	Operating procedures	8
3.1.3	Result.....	9
3.2	Real-time group list	11
3.2.1	Parameters	11
3.2.2	Operating procedures	11
3.2.3	Result.....	12
3.3	Real-time tags configuration list.....	13
3.3.1	Parameters	13
3.3.2	Operating procedures	14
3.3.3	Result.....	15
3.4	Tags data list	17
3.4.1	Parameters	17
3.4.2	Operating procedures	18
3.4.3	Result.....	19
3.5	Modify tag data	20
3.5.1	Parameters	20
3.5.2	Operating procedures	21
3.5.3	Result.....	22
3.6	Historical tags name list.....	22
3.6.1	Parameters	22
3.6.2	Operating procedures	23
3.6.3	Result.....	24
3.7	Historical tag data list	25
3.7.1	Parameters	25
3.7.2	Operating procedures	25

3.7.3	Result.....	27
3.8	Alarm tags data list	28
3.8.1	Parameters	28
3.8.2	Operating procedures	29
3.8.3	Result.....	31
4	Appendix	33
4.1	Data type	33

1 General

This documents introduces WECON V-BOX HTTP API. And this document also shows some examples. All example is tested from postman application.

Server address: <http://api.v-box.net/box-data/api/{acturl}>

Transport protocol: HTTP protocol

1.1 Interface parameter description

Global parameters

The following acturls need to have global parameters (The global parameter client is put into the JSON format and placed in the common parameters of the Headers)

Parameters	Description
sid	sessionId session ID (Obtained after login, and is used for all acturls after login)
comid	Company ID (Obtained from WECON, and is used for all acturls)
compvtkey	Company private key (Obtained from WECON, and is used for all acturls)
ts	Timestamp (UTC time: 1970-1-1 00:00:00 to the current client time in seconds)
sign	How to get sign Step 1: Format the request parameter as <i>key=value</i> (Including parameters of acturl and parameters parsed by commons of Headers). Such as <i>k1=v1, k2=v2, k3=v3</i>; Step 2: The "key=value" formatted in the first step is sorted in ascending order of the first letter of the key name, and then joined together. Such as <i>k1=v1&k2=v2&k3=v3</i> (Null value, no need to splicing); Step 3: Add <i>screctkey</i>, at the end of step 2. Such as <i>&key=f1cd9351930d4e589922edbcf3b09a7c</i> The MD5 value of step 3 string is sign Note: The value of each key is calculated without the actual value of urlencode

The returned result represented by Json and case sensitive:

1) Abnormal

```
{"code" : 403, "msg" : "SessionID (user session ID) invalid", "reqId": "1502074141465"}
```

2) Normal

```
{"code" : 200 , "result": {}, "msg" : "ok", "reqId":"1502074141465"}
```

State code description

Codes	Description
200	Success
403	SessionID (User session ID) invalid
400	Illegal parameter value
503	Unknown server error

1.2 Example key and value

- 1) **comid**=2
- 2) **comkey**=589625dce895454dbff9782c299db156
- 3) **screctkey**=f1cd9351930d4e589922edbcf3b09a7c
- 4) **ts**=1573897380

2 Basic API

2.1 Login operation

2.1.1 Parameters

Acturl	we-data/login	
Function	Login with username, email, phone number	
Parameters	Items	Description
	alias	Username, email, phone number
	password	Password (Encrypted with md5)
Return value	Items	Description
	utype	User Type: 1-Manage Account, 2-Viewer Account
	sid	User session ID

2.1.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/login>

POST	▼	http://api.v-box.net/box-data/api/we-data/login
------	---	---

Step 2: Set parameters on Params

alias: weconuser

password: 599a3c736c04e196c58a29f43778f7ea(Wecon159)

POST
http://api.v-box.net/box-data/api/we-data/login?alias=weconuser&password=599a3c736c04e196c58a29f...

Params
Authorization
Headers
Body
Pre-request Script
Tests
Settings

Query Params

	KEY	VALUE	DESCRIPTION
☒	alias	weconuser	
☒	password	599a3c736c04e196c58a29f43778f7ea	
	Key	Value	Description

Step 3: Get sign

alias=weconuser&comid=2&compvtkey=589625dce895454dbff9782c299db156&password=599a3c736c04e196c58a29f43778f7ea&ts=1573897380&key=f1cd9351930d4e589922edbcf3b09a7c
MD5 value: 997513ff1320862f0cbb9ce19d0bd253

Step 4: Set common of header

{"comid":"2","compvtkey":"589625dce895454dbff9782c299db156","ts":"1573897380","sign":"997513ff1320862f0cbb9ce19d0bd253"}

POST
http://api.v-box.net/box-data/api/we-data/login?alias=weconuser&password=599a3c736c04e196c58a29f...

Params
Authorization
Headers (9)
Body
Pre-request Script
Tests
Settings

▼ Headers (1)

	KEY	VALUE	DESCRIPTION
☒	common	{"comid":"2","compvtkey":"589625dce895454dbff9782c299db156","ts":"1573897380","sign":"997513ff1320862f0cbb9ce19d0bd253"}	
	Key	Value	Description

2.1.3 Result


```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573899119000",
  "result": {
    "utype": 1,
    "ztRole": 1,

```

```
"sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad"
```

```
}
```

```
}
```

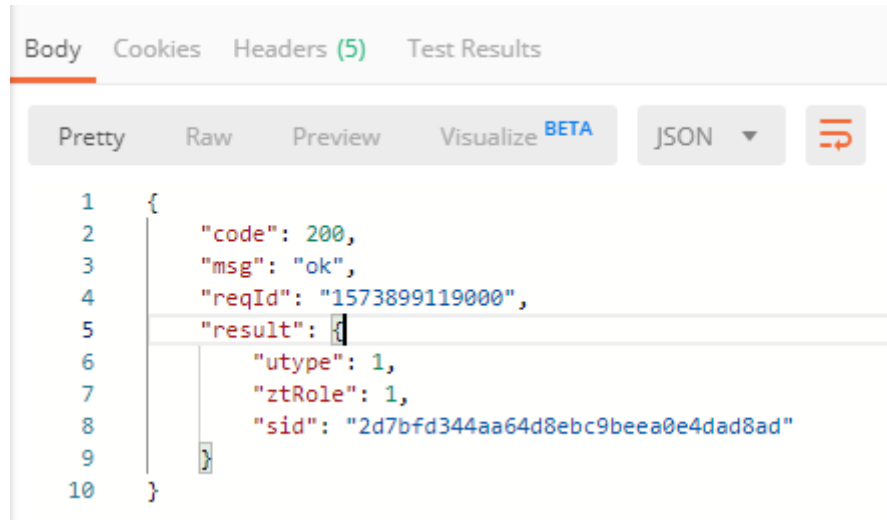

The screenshot shows the 'Body' tab of a web browser's developer tools. The response is a JSON object with the following structure:

```

1  {
2    "code": 200,
3    "msg": "ok",
4    "reqId": "1573899119000",
5    "result": {
6      "utype": 1,
7      "ztRole": 1,
8      "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad"
9    }
10 }
```

3 Service data APIs

3.1 V-Box list

3.1.1 Parameters

acturl	we-data/boxs				
	Functions				
	Get a list of Vbox (VBox list only show in management account)				
Parameters	None				
Return value	Field name		Description		
	list	Data list			
		groupName	Group name		
		boxList	VBox list		
			boxId	VBox ID	
			boxName	VBox name	
			map	Latitude and longitude	
			state	status	
			isAlarm	Alarm or not	
			machineCode	Machine code	
			devModel	Machine model	
			remark	Note	

3.1.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/boxs>

POST
▼
http://api.v-box.net/box-data/api/we-data/boxs

Step 2: Set parameters on Params

No parameters for this acturl, so no need to set.

Step 3: Get sign

comid=2&compvtkey=589625dce895454dbff9782c299db156&sid=2d7bfd344aa64d8ebc9beea0e4dad8ad&ts=1573897380&key=f1cd9351930d4e589922edbcf3b09a7c
MD5 value: 8fb4fbf99fcc1331c3274e708a403034

Step 4: Set common of header

```
{"sid":"2d7bfd344aa64d8ebc9beea0e4dad8ad","comid":"2","compvtkey":"589625dce895454dbff9782c299db156","ts":"1573897380","sign":"8fb4fbf99fcc1331c3274e708a403034"}
```

POST
http://api.v-box.net/box-data/api/we-data/boxs

Params
Authorization
Headers (9)
Body
Pre-request Script
Tests
Settings

▼ Headers (1)

	KEY	VALUE	DESCRIPTION
☒	common	{"sid":"2d7bfd344aa64d8ebc9beea0e4dad8ad","comid":"2","compvtkey":"589625dce895454dbff9782c299db156","ts":"1573897380","sign":"8fb4fbf99fcc1331c3274e708a403034"}	
	Key		Description

3.1.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573900361203",
  "result": {
    "list": [
      {
        "groupName": "默认组",
        "boxList": [
          {
            "machineCode": "V01001171116005027a279eb001",
            "devModel": "V-BOX S-00",
            "isAlarm": 0,
            "boxName": "Treatment Systems",
            "remark": "",
            "state": "1",
            "map": "78.178613,9.177124",
            "boxId": "913"
          },
          .....
        ]
      }
    ]
  }
}
```

```

        {
            "machineCode": "Vir001171116005027a27201908",
            "devModel": "V-BOX S-00",
            "isAlarm": 0,
            "boxName": "智能农场(Smart farm)",
            "remark": "",
            "state": "1",
            "map": "88.637476,50.415074",
            "boxId": "973"
        }
    ]
},
.....
{
    "groupName": "制造业(Manufacturing)",
    "boxList": [
        {
            "machineCode": "Vir001171116005027a27201904",
            "devModel": "V-BOX S-00",
            "isAlarm": 0,
            "boxName": "调流调压(Adjustment)",
            "remark": "",
            "state": "1",
            "map": "109.316038,33.749868",
            "boxId": "957"
        },
        .....
        {
            "machineCode": "Vir001171116005027a27201915",
            "devModel": "V-BOX S-00",
            "isAlarm": 0,
            "boxName": "纺织机房",
            "remark": "",
            "state": "1",
            "map": "121.357068,24.312132",
            "boxId": "975"
        }
    ]
}
]
}
}
}
}

```

```

9      "boxList": [
10      {
11          "machineCode": "V01001171116005027a279eb001",
12          "devModel": "V-BOX S-00",
13          "isAlarm": 0,
14          "boxName": "Treatment Systems",
15          "remark": "",
16          "state": "1",
17          "map": "78.178613,9.177124",
18          "boxId": "913"
19      },
20      {
21          "machineCode": "V01001171116005027a279eb000",
22          "devModel": "V-BOX S-00",
23          "isAlarm": 0,
24          "boxName": "水处理系统",
25          "remark": "",
26          "state": "1",

```

3.2 Real-time group list

3.2.1 Parameters

acturl	we-data/realgroups		
Functions	Get V-BOX's tags group list		
Parameters	Parameter	Description	
	boxId	VBoxID ("None" means custom grouping)	
Return value	Field name	Description	
	list	Group list	
		groupId	Group ID
		groupName	Group name

3.2.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/realgroups>

POST	http://api.v-box.net/box-data/api/we-data/realgroups
------	---

Step 2: Set parameters on Params

"boxId": "973"

POST http://api.v-box.net/box-data/api/we-data/realgroups?boxId=973			
Params Authorization Headers (9) Body Pre-request Script Tests Settings			
Query Params			
KEY	VALUE	DESCRIPTION	
☒ boxId	973		

Step 3: Get sign

boxId=973&comid=2&compvtkey=589625dce895454dbff9782c299db156&sid=2d7bfd344aa64d8ebc9beea0e4dad8ad&ts=1573897380&key=f1cd9351930d4e589922edbcf3b09a7c
MD5 value: 9b267b7549083167954b7ede30916ff5

Step 4: Set common of header

```
{
  "boxId": "973",
  "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad",
  "comid": "2",
  "compvtkey": "589625dce895454dbff9782c299db156",
  "ts": "1573897380",
  "sign": "9b267b7549083167954b7ede30916ff5"
}
```

POST http://api.v-box.net/box-data/api/we-data/realgroups?boxId=973			
Params Authorization Headers (9) Body Pre-request Script Tests Settings			
▼ Headers (1)			
KEY	VALUE	DESCRIPTION	
☒ common	{ "boxId": "973", "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad", "comid": "2", "compvtkey": "589625dce895454dbff9782c299db156", "ts": "1573897380", "sign": "9b267b7549083167954b7ede30916ff5" }		
Key		Description	


3.2.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573901906667",
  "result": {
    "list": [
      {
        "groupName": "Temperature",
        "groupId": 7325
      },
      {
        "groupName": "Humidity",
        "groupId": 7326
      }
    ]
  }
}
```

```

    },
    {
      "groupName": "Button switch",
      "groupId": 7327
    }
  ]
}
}

```

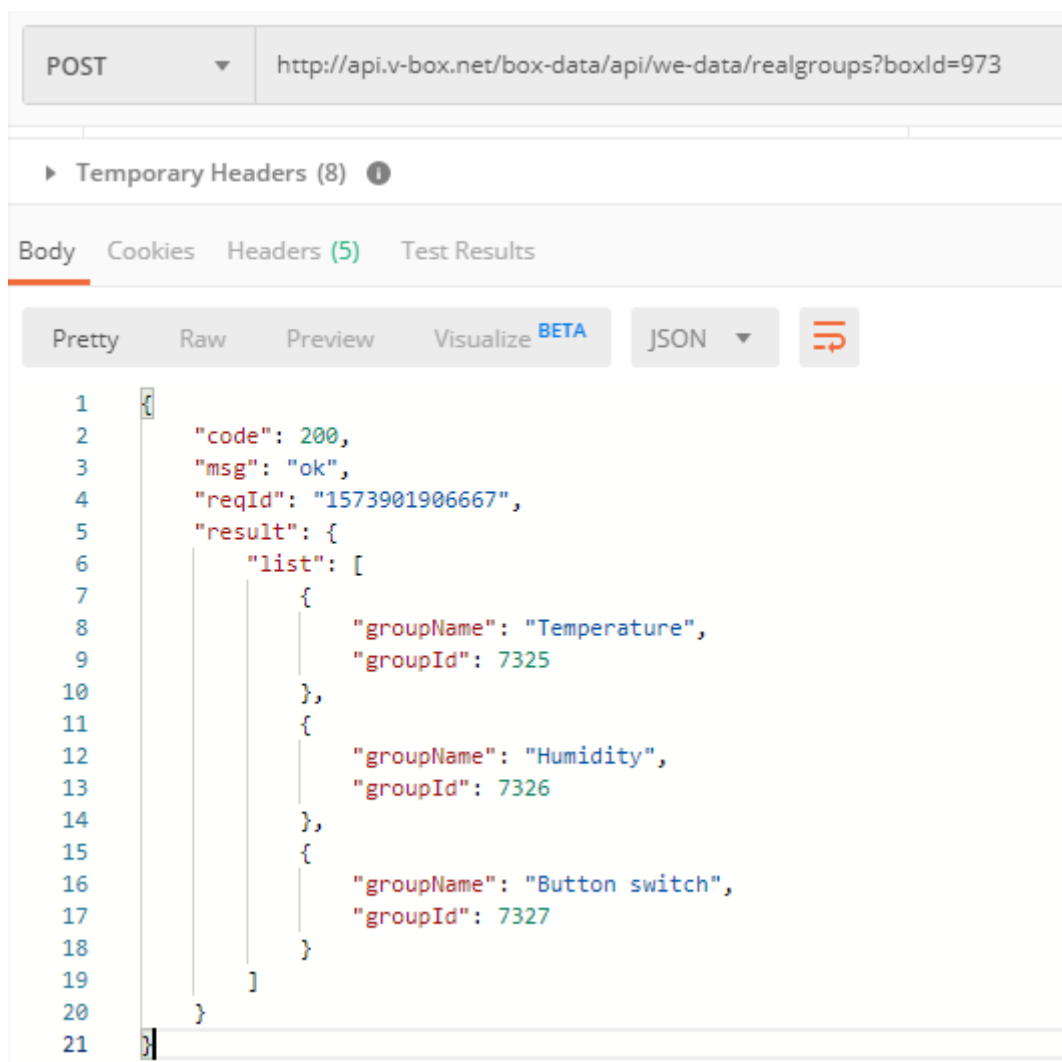

3.3 Real-time tags configuration list

3.3.1 Parameters

acturl	we-data/realcfgs
--------	------------------

Functions	Get the tags configuration information in the specified group in V-BOX.		
	Parameter	Description	
Parameters	boxId	VBoxID(“None” means custom tags grouping)	
	groupId	Group ID (Required)	
	pageSize	Number of each page, 10 by default	
	pageIndex	Number of current page, start from 1	
	Field name	Description	
Return value	cfgList	monitorId	Tags ID
		monitorName	Tags name
		updTime	Last update time
		dataId	type of data 100: 16-bit binary 101: 16-digit octal Refer to Appendix 1
		addr	Address
		addrType	0: bit address 1: byte address 2: word address 3: double word
		digitCount	Integer digits, decimal places
		digitBinary	Data type and integer digits, decimal places
		dataLimit	Data range
		rid	Address
		roleType	Permission: 1-read only, 2-write only, 3-read-write
	totalPage	Total pages	
	totalRecord	Total record number	
	currentPage	Current page number	

3.3.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/realcfgs>

POST	▼	http://api.v-box.net/box-data/api/we-data/realcfgs
------	---	---

Step 2: Set parameters on Params

"boxId":"973"

```
"groupId":"7325"
```

```
"pageSize":"5"
```

```
"pageIndex":"2"
```

POST
http://api.v-box.net/box-data/api/we-data/realcfgs?boxId=973&groupId=7325&pageSize=5&pageIndex=2

Params
Authorization
Headers
Body
Pre-request Script
Tests
Settings

Query Params

	KEY	VALUE	DESCRIPTION
☒	boxId	973	
☒	groupId	7325	
☒	pageSize	5	
☒	pageIndex	2	

Step 3: Get sign

```
boxId=973&comid=2&compvtkey=589625dce895454dbff9782c299db156&groupId=7325&page  
Index=2&pageSize=5&sid=2d7bfd344aa64d8ebc9beea0e4dad8ad&ts=1573897380&key=f1cd9  
351930d4e589922edbcf3b09a7c
```

MD5 sign: [0769228e66c945eed5431c41a96949f2](#)

Step 4: Set common of header

```
{"boxId":"973","groupId":"7325","pageSize":"5","pageIndex":"2","sid":"2d7bfd344aa64d8ebc9  
beea0e4dad8ad","comid":"2","compvtkey":"589625dce895454dbff9782c299db156","ts":"1573  
897380","sign":"0769228e66c945eed5431c41a96949f2"}
```

POST
http://api.v-box.net/box-data/api/we-data/realcfgs?boxId=973&groupId=7325&pageSize=5&pageIndex=2

Params
Authorization
Headers (9)
Body
Pre-request Script
Tests
Settings

▼ Headers (1)

	KEY	VALUE	DESCRIPTION
☒	common	<pre>{ "boxId": "973", "groupId": "7325", "pageSize": "5", "pageIndex": "2", "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad", "comid": "2", "compvtkey": "589625dce895454dbff9782c299db156", "ts": "1573897380", "sign": "0769228e66c945eed5431c41a96949f2" }</pre>	
	Key		Description

▶ Temporary Headers (8) ⓘ

3.3.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573903822419",
  "result": {
    "cfgList": [
      {
        "monitorId": 91545,
        "dataId": 105,
        "monitorName": "Temp_9",
        "updTime": 1571965761000,
        "dataLimit": "0 7999",
        "digitBinary": "十进制",
        "addr": "9",
        "rid": "D",
        "roleType": 3,
        "digitCount": "5,0",
        "addrType": 2
      },
      .....
      {
        "monitorId": 91541,
        "dataId": 105,
        "monitorName": "Temp_5",
        "updTime": 1571965761000,
        "dataLimit": "0 7999",
        "digitBinary": "十进制",
        "addr": "5",
        "rid": "D",
        "roleType": 3,
        "digitCount": "5,0",
        "addrType": 2
      }
    ],
    "totalPage": 3,
    "totalRecord": 15,
    "currentPage": 2
  }
}
```

```

POST http://api.v-box.net/box-data/api/we-data/realcfgs?boxId=973&groupId=7325&pageSize=5&pageIndex=2

Pretty Raw Preview Visualize BETA JSON
{
  "dataId": 105,
  "monitorName": "Temp_6",
  "updTime": 1571965761000,
  "dataLimit": "0 7999",
  "digitBinary": "十进制",
  "addr": "6",
  "rid": "D",
  "roleType": 3,
  "digitCount": "5,0",
  "addrType": 2
},
{
  "monitorId": 91541,
  "dataId": 105,
  "monitorName": "Temp_5",
  "updTime": 1571965761000,
  "dataLimit": "0 7999",
  "digitBinary": "十进制",
  "addr": "5",
  "rid": "D",
  "roleType": 3,
  "digitCount": "5,0",
  "addrType": 2
},
  "totalPage": 3,
  "totalRecord": 15,
  "currentPage": 2
}

```

3.4 Tags data list

3.4.1 Parameters

acturl	we-data/realdata	
Functions	Get the tags data in the specified group in V-BOX.	
Parameters	Parameter	Description
	boxId	VBoxID("None" means custom tag grouping)
	groupId	Group ID (Required)
	pageSize	Number of each page, 10 by default
	pageIndex	Number of current page, start from 1
Return value	Field name	Description

	List	Real-time data list	
		com	Communication port ID
		monitorId	Tag ID
		monitorName	Tag name
		state	status
		value	Value
		groupId	Group ID
	totalPage	Total pages	
	totalRecord	Total record	
	currentPage	current page	

3.4.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/realdata>

POST
http://api.v-box.net/box-data/api/we-data/realdata

Step 2: Set parameters on Params

"boxId":"973"

"groupId":"7325"

"pageSize":"5"

"pageIndex":"2"

POST
http://api.v-box.net/box-data/api/we-data/realdata?boxId=973&groupId=7325&pageSize=5&pageIndex=2

Params	Authorization	Headers	Body	Pre-request Script	Tests	Settings
Query Params						
	KEY	VALUE	DESCRIPTION			
☒	boxId	973				
☒	groupId	7325				
☒	pageSize	5				
☒	pageIndex	2				

Step 3: Get sign

boxId=973&comid=2&compvtkey=589625dce895454dbff9782c299db156&groupId=7325&page
Index=2&pageSize=5&sid=2d7bfd344aa64d8ebc9beea0e4dad8ad&ts=1573897380&key=f1cd9

351930d4e589922edbcf3b09a7c

MD5 sign: 0769228e66c945eed5431c41a96949f2

Step 4: Set common of header

```
{"boxId":"973","groupId":"7325","pageSize":"5","pageIndex":"2","sid":"2d7bfd344aa64d8ebc9beea0e4dad8ad","comid":"2","compvtkey":"589625dce895454dbff9782c299db156","ts":"1573897380","sign":"0769228e66c945eed5431c41a96949f2"}
```

3.4.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573905679365",
  "result": {
    "totalPage": 3,
    "list": [
      {
        "com": 2939,
        "monitorId": 91545,
        "monitorName": "Temp_9",
        "groupId": 0,
        "state": "1",
        "value": "90"
      },
      .....
    ],
    {
      "com": 2939,
      "monitorId": 91541,
      "monitorName": "Temp_5",
      "groupId": 0,
      "state": "1",
      "value": "87"
    }
  ],
  "totalRecord": 15,
  "currentPage": 2
}
```

```

POST http://api.v-box.net/box-data/api/we-data/realdata?boxId=973&groupId=7325&pageSize=5&pageIndex=2

Pretty Raw Preview Visualize BETA JSON
{
  "com": 2939,
  "monitorId": 91543,
  "monitorName": "Temp_7",
  "groupId": 0,
  "state": "1",
  "value": "35"
},
{
  "com": 2939,
  "monitorId": 91542,
  "monitorName": "Temp_6",
  "groupId": 0,
  "state": "1",
  "value": "3"
},
{
  "com": 2939,
  "monitorId": 91541,
  "monitorName": "Temp_5",
  "groupId": 0,
  "state": "1",
  "value": "87"
}
],
"totalRecord": 15,
"currentPage": 2
}

```

3.5 Modify tag data

3.5.1 Parameters

acturl	we-data/updrealdata	
Functions	Modify tag data	
Parameters	Parameter	Description
	monitorId	Tag ID
	value	value
Return value	None	

3.5.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/updrealdata>

POST	http://api.v-box.net/box-data/api/we-data/updrealdata
------	---

Step 2: Set parameters on Params

"monitorId":"91541"

"value":"60"

POST	http://api.v-box.net/box-data/api/we-data/updrealdata?monitorId=91541&value=60					
Params	Authorization	Headers	Body	Pre-request Script	Tests	Settings
Query Params						
	KEY	VALUE	DESCRIPTION			
☒	monitorId	91541				
☒	value	60				

Step 3: Get sign

comid=2&compvtkey=589625dce895454dbff9782c299db156&monitorId=91541&sid=2d7bfd344aa64d8ebc9beea0e4dad8ad&ts=1573897380&value=60&key=f1cd9351930d4e589922edbcf3b09a7c

MD5 sign: [4119b1abc9176a187f781bece04a5296](#)


Step 4: Set common of header

{"monitorId":"91541","value":"60","sid":"2d7bfd344aa64d8ebc9beea0e4dad8ad","comid":"2","compvtkey":"589625dce895454dbff9782c299db156","ts":"1573897380","sign":"[4119b1abc9176a187f781bece04a5296](#)"}

POST	http://api.v-box.net/box-data/api/we-data/updrealdata?monitorId=91541&value=60					
Params	Authorization	Headers (9)	Body	Pre-request Script	Tests	Settings
▼ Headers (1)						
☒	common	{ "monitorId": "91541", "value": "60", "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad", "comid": "2", "compvtkey": "589625dce895454dbff9782c299db156", "ts": "1573897380", "sign": "4119b1abc9176a187f781bece04a5296" }	Description			
► Temporary Headers (8) ⓘ						

3.5.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573907138803",
  "result": {}
}
```

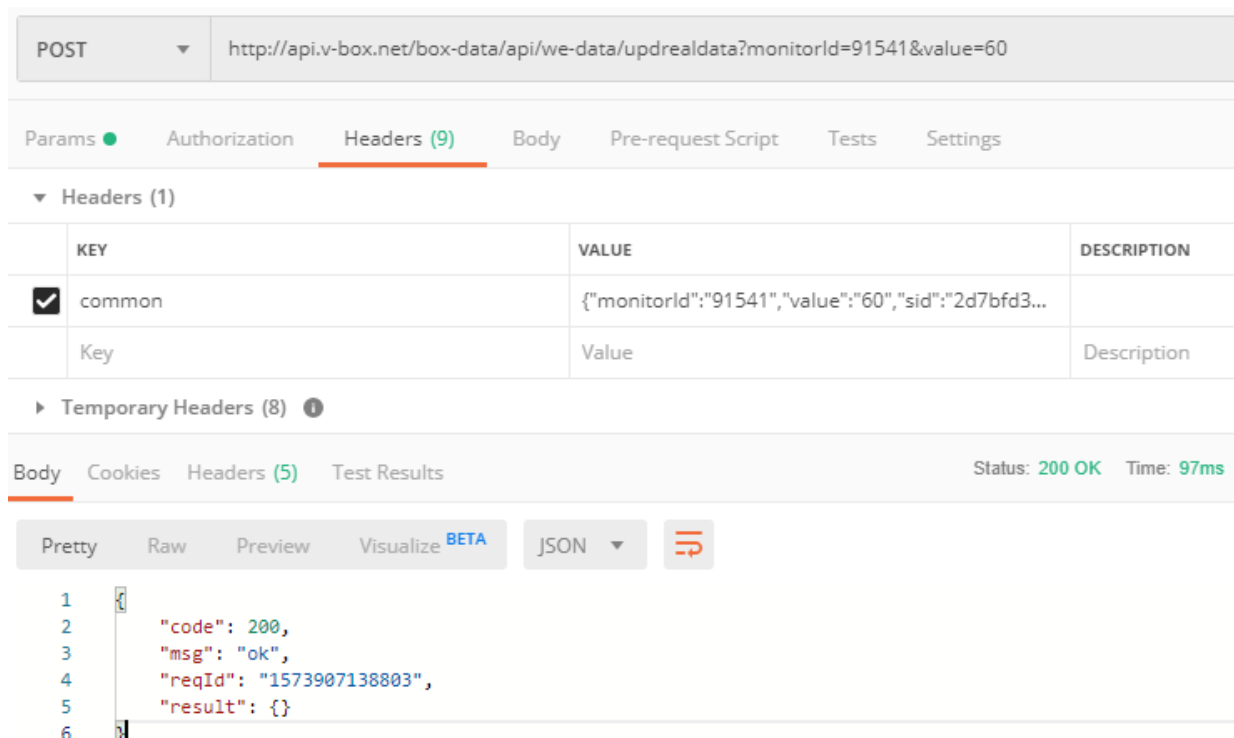

POST http://api.v-box.net/box-data/api/we-data/updrealdata?monitorId=91541&value=60

Params Authorization Headers (9) Body Pre-request Script Tests Settings

▼ Headers (1)

KEY	VALUE	DESCRIPTION
☒ common	{"monitorId": "91541", "value": "60", "sid": "2d7bfd3..."}	
Key	Value	Description

► Temporary Headers (8) ⓘ

Body Cookies Headers (5) Test Results Status: 200 OK Time: 97ms

Pretty Raw Preview Visualize BETA JSON ▼

```
1 {
2   "code": 200,
3   "msg": "ok",
4   "reqId": "1573907138803",
5   "result": {}
6 }
```

3.6 Historical tags name list

3.6.1 Parameters

acturl	we-data/monitors	
Functions	Get a list of historical tags	
Parameters	Parameter	Description
	boxId	VBoxID (Not required)
Return value	Field name	Description

	list	Tag list	
		monitorId	tag ID
		monitorName	tag name

3.6.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/monitors>

POST

http://api.v-box.net/box-data/api/we-data/updrealdata

Step 2: Set parameters on Params

"boxId": "973"

POST

http://api.v-box.net/box-data/api/we-data/monitors?boxId=973

Params

Authorization

Headers

Body

Pre-request Script

Tests

Settings

Query Params

	KEY	VALUE	DESCRIPTION
☒	boxId	973	

Step 3: Get sign

boxId=973&comid=2&compvtkey=589625dce895454dbff9782c299db156&sid=2d7bfd344aa64d8ebc9beea0e4dad8ad&ts=1573897380&key=f1cd9351930d4e589922edbcf3b09a7c
MD5 sign: [9b267b7549083167954b7ede30916ff5](#)

Step 4: Set common of header

{"boxId": "973", "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad", "comid": "2", "compvtkey": "589625dce895454dbff9782c299db156", "ts": "1573897380", "sign": "[9b267b7549083167954b7ede30916ff5](#)"}

POST

http://api.v-box.net/box-data/api/we-data/monitors?boxId=973

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Settings

▼ Headers (1)

	KEY	VALUE	DESCRIPTION
☒	common	{"boxId": "973", "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad", "comid": "2", "compvtkey": "589625dce895454dbff9782c299db156", "ts": "1573897380", "sign": " 9b267b7549083167954b7ede30916ff5 "}	
	Key		Description

► Temporary Headers (8)

3.6.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573907813693",
  "result": {
    "list": [
      {
        "monitorId": 91576,
        "monitorName": "Hum",
        "groupId": 7328
      },
      {
        "monitorId": 91577,
        "monitorName": "Temp",
        "groupId": 7328
      }
    ]
  }
}
```

POST <http://api.v-box.net/box-data/api/we-data/monitors?boxId=973>

Pretty Raw Preview Visualize BETA

JSON



```
1  {
2    "code": 200,
3    "msg": "ok",
4    "reqId": "1573907813693",
5    "result": {
6      "list": [
7        {
8          "monitorId": 91576,
9          "monitorName": "Hum",
10         "groupId": 7328
11        },
12        {
13          "monitorId": 91577,
14          "monitorName": "Temp",
15          "groupId": 7328
16        }
17      ]
18    }
19  }
```

3.7 Historical tag data list

3.7.1 Parameters

acturl	we-data/historydata		
	Get historical data		
Parameters	Parameter		Description
	monitorId	tag ID, (Required)	
	monitorBeginTime	Monitoring start time, (Not required)	
	monitorEndTime	Monitoring end time, (Not required)	
	pageSize	Number of each page, 10 by default	
	pageIndex	Number of current page, start from 1	
	Field name		Description
Return value	list	Historical data list	
		monitorName	tag name
		monitorTime	Monitoring time
		value	Value
	totalPage	Total pages	
	totalRecord	Total records	
	currentPage	Current page	

3.7.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/historydata>

POST	▼	http://api.v-box.net/box-data/api/we-data/historydata
------	---	---

Step 2: Set parameters on Params

"monitorId": 91577

"monitorBeginTime": "2019-11-16 10:45:44.000"

"monitorEndTime": "2019-11-16 20:45:44.000"

"pageSize": "10"

"pageIndex": "2"

3.7.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573909705772",
  "result": {
    "totalPage": 12,
    "list": [
      {
        "monitorTime": 1573905337000,
        "groupName": "His",
        "monitorTime_show": "2019-11-16 19:55:37.000",
        "monitorName": "Temp",
        "groupId": 7328,
        "value": "914"
      },
      .....
      {
        "monitorTime": 1573902637000,
        "groupName": "His",
        "monitorTime_show": "2019-11-16 19:10:37.000",
        "monitorName": "Temp",
        "groupId": 7328,
        "value": "422"
      }
    ],
    "totalRecord": 120,
    "currentPage": 2
  }
}
```

```

POST http://api.v-box.net/box-data/api/we-data/historydata?monitorId=91577&monitorBeginTime=2019-11-1...

Pretty Raw Preview Visualize BETA JSON
{
  "groupId": 7328,
  "value": "959"
},
{
  "monitorTime": 1573902937000,
  "groupName": "His",
  "monitorTime_show": "2019-11-16 19:15:37.000",
  "monitorName": "Temp",
  "groupId": 7328,
  "value": "663"
},
{
  "monitorTime": 1573902637000,
  "groupName": "His",
  "monitorTime_show": "2019-11-16 19:10:37.000",
  "monitorName": "Temp",
  "groupId": 7328,
  "value": "422"
}
],
"totalRecord": 120,
"currentPage": 2
}

```

3.8 Alarm tags data list

3.8.1 Parameters

acturl	we-data/alarmdata	
	Function	
Parameters	Get alarm data	
	Parameter	Description
	boxId	VBoxID, (Required)
	monitorBeginTime	Monitoring start time, (Not required)
	monitorEndTime	Monitoring end time, (Not required)
	pageSize	Number of each page, 10 by default
	pageIndex	Number of current page, start from 1
	state	Status 1-unconfirmed, 2-confirm
	alarmType	Alarm events: 1-trigger alarm, 0-disarm (Not necessary)
	alarmLevel	Alarm level: 1 general alarm,

Return value		2 serious alarm, 3 particularly serious alarm (Not necessary)	
	Field name	Description	
	List	Alarm data list	
		monitorId	tag ID
		monitorName	tag name
		state	status
		value	Value
		monitorTime	Monitoring time
		alarmType	Alarm event
		alarmLevel	Alarm level
	totalPage	Total pages	
	totalRecord	Total records	
	currentPage	Current page	

3.8.2 Operating procedures

Step 1: Set http: <http://api.v-box.net/box-data/api/we-data/alarmdata>

POST	▼	http://api.v-box.net/box-data/api/we-data/alarmdata
------	---	---

Step 2: Set parameters on Params

```
"monitorId":"91931"
"monitorBeginTime":"2019-11-16 20:30:44.000"
"monitorEndTime":"2019-11-16 21:30:44.000"
"pageSize":"10"
"pageIndex":"1"
"state":"2"
```

POST	http://api.v-box.net/box-data/api/we-data/alarmdata?monitorId=91931&monitorBeginTime=2019-11-16...		
Params	Authorization	Headers	Body
Query Params			
	KEY	VALUE	DESCRIPTION
☒	monitorId	91931	
☒	monitorBeginTime	2019-11-16 20:30:44.000	
☒	monitorEndTime	2019-11-16 21:30:44.000	
☒	pageSize	10	
☒	pageIndex	1	
☒	state	2	

Step 3: Get sign

comid=2&compvtkey=589625dce895454dbff9782c299db156&monitorBeginTime=2019-11-16 20:30:44.000&monitorEndTime=2019-11-16 21:30:44.000&monitorId=91931&pageIndex=1&pageSize=10&sid=2d7bfd344aa64d8ebc9beea0e4dad8ad&state=2&ts=1573897380&key=f1cd9351930d4e589922edbcf3b09a7c
MD5 sign: [4056006bbc71bd80a3c632987626e15b](#)

Step 4: Set common of header

```
{
  "monitorId": "91931",
  "monitorBeginTime": "2019-11-16 20:30:44.000",
  "monitorEndTime": "2019-11-16 21:30:44.000",
  "pageSize": "10",
  "pageIndex": "1",
  "state": "2",
  "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad",
  "comid": "2",
  "compvtkey": "589625dce895454dbff9782c299db156",
  "ts": "1573897380",
  "sign": "4056006bbc71bd80a3c632987626e15b"
}
```

POST

http://api.v-box.net/box-data/api/we-data/alarmdata?monitorId=91931&monitorBeginTime=2019-11-16 ...

▼ Headers (1)

	KEY	VALUE	DESCRIPTION
☒	common	{ "monitorId": "91931", "monitorBeginTime": "2019-11-16 20:30:44.000", "monitorEndTime": "2019-11-16 21:30:44.000", "pageSize": "10", "pageIndex": "1", "state": "2", "sid": "2d7bfd344aa64d8ebc9beea0e4dad8ad", "comid": "2", "compvtkey": "589625dce895454dbff9782c299db156", "ts": "1573897380", "sign": "4056006bbc71bd80a3c632987626e15b" }	
	Key		Description
▶ Temporary Headers (8) ⓘ			
Body	Cookies	Headers (5)	Test Results
			OK Time: 60ms

3.8.3 Result

```
{
  "code": 200,
  "msg": "ok",
  "reqId": "1573911745258",
  "result": {
    "totalPage": 1,
    "list": [
      {
        "monitorTime": 1573910934000,
        "alarmType": 0,
        "monitorId": 4437,
        "monitorTime_show": "2019-11-16 21:28:54",
        "monitorName": "Temperature alarm",
        "alarmLevel": 2,
        "state": 2,
        "text": "The temperature is too high",
        "value": "1",
        "alarm_role": 0
      },
      .....
      {
        "monitorTime": 1573910855000,
        "alarmType": 1,
        "monitorId": 4437,
        "monitorTime_show": "2019-11-16 21:27:35",
        "monitorName": "Temperature alarm",
        "alarmLevel": 2,
        "state": 2,
        "text": "The temperature is too high",
        "value": "18",
        "alarm_role": 0
      }
    ],
    "totalRecord": 6,
    "currentPage": 1
  }
}
```

POST

http://api.v-box.net/box-data/api/we-data/alarmdata?monitorId=91931&monitorBeginTime=2019-11-16 ...

Pretty

Raw

Preview

Visualize BETA

JSON



```
61     "monitorName": "Temperature alarm",
62     "alarmLevel": 2,
63     "state": 2,
64     "text": "The temperature is too high",
65     "value": "9",
66     "alarm_role": 0
67   },
68   {
69     "monitorTime": 1573910855000,
70     "alarmType": 1,
71     "monitorId": 4437,
72     "monitorTime_show": "2019-11-16 21:27:35",
73     "monitorName": "Temperature alarm",
74     "alarmLevel": 2,
75     "state": 2,
76     "text": "The temperature is too high",
77     "value": "18",
78     "alarm_role": 0
79   }
80 ],
81 "totalRecord": 6,
82 "currentPage": 1
83 }
84 }
```

4 Appendix

4.1 Data type

100: 16-bit binary
101: 16-bit octal
102: 16-bit hexadecimal
103: 16-bit BCD code
104: 16-bit signed decimal
105: 16-bit unsigned decimal
200: 32-bit binary
201: 32-bit octal
202: 32-bit hexadecimal
203: 32-bit BCD
204: 32-bit signed decimal
205: 32-bit unsigned decimal
206: 32-bit floating
400: 64-bit binary
401: 64-bit octal
402: 64-bit hexadecimal
403: 64-bit BCD
404: 64-bit signed decimal
405: 64-bit unsigned decimal
406: 64-bit floating
1000: string